

# BEHRINGER®

## BE110P03AH Data Sheet

### Dimensional Data:

Length: 6.02 IN  
OD (Top): 1.88 IN  
OD (Bottom): 1.88 IN  
ID (Top): 0.87 IN  
ID (Bottom): None  
Thread: None




### Performance Data:

Micron Rating: 3.00  
Maximum Temperature: 225 °F  
Collapse Rating: 3000 PSID  
Flow Direction: Out to In  
Recommended Change Out: 25 PSID  
By-Pass: None

### Physical Specifications:

Media: Microglass  
Gasket Material: Buna  
Gasket Type: O-Ring  
Adhesive: Epoxy  
End Caps: Corrosion Resistant CS/AL  
Center Tube: Corrosion Resistant CS  
Configuration: SOE

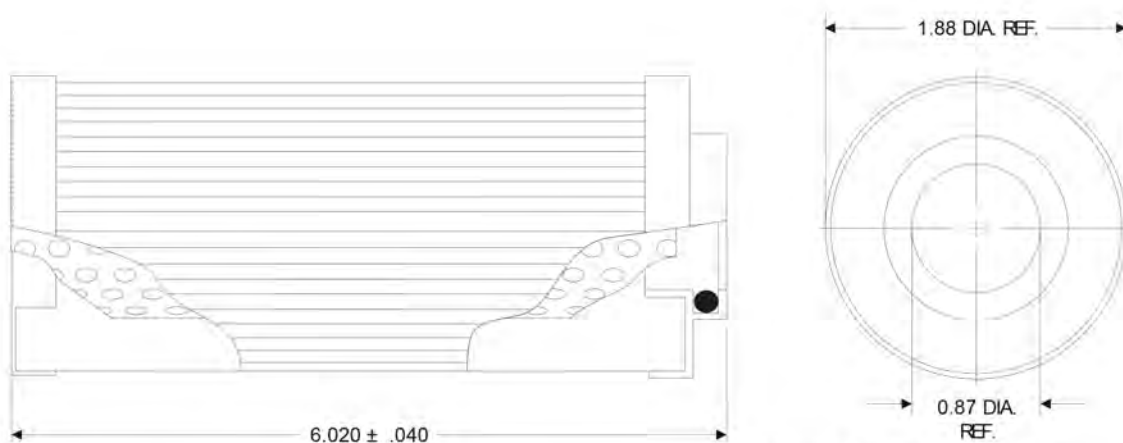

Collapse Rating: 3000 PSID  
Filtration Rating:  $B_x = 200$   
 $B_{[c]} = 1000$

END CAPS	CORROSION RESISTANT STEEL / ALUM.
CENTER TUBE	CORROSION RESISTANT STEEL
MEDIA GRADE	A BETA 200 MICROGLASS W STAINLESS STEEL WIRE MESH
SEALS	NITRILE (-45°F TO 225°F) FLUOROCARBON (-20°F TO 250°F)

Tolerances (Unless otherwise specified)	
0.0	: ± 0.090"
0.00	: ± 0.030"
0.000	: ± 0.005"