

BEHRINGER®

BE110P03AV Data Sheet

Dimensional Data:

Length: 6.02 IN
OD (Top): 1.88 IN
OD (Bottom): 1.88 IN
ID (Top): 0.87 IN
ID (Bottom): None
Thread: None




Performance Data:

Micron Rating: 3.00
Maximum Temperature: 225 °F
Collapse Rating: 450 PSID
Flow Direction: Out to In
Recommended Change Out: 25 PSID
By-Pass: None

Physical Specifications:

Media: Microglass
Gasket Material: Viton
Gasket Type: O-Ring
Adhesive: Epoxy
End Caps: Corrosion Resistant CS/AL
Center Tube: Corrosion Resistant CS
Configuration: SOE

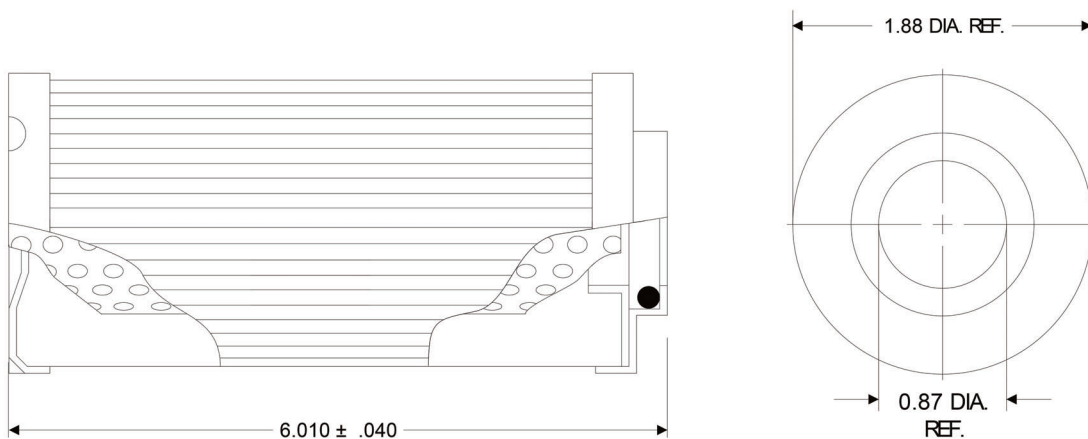

END CAPS	CORROSION RESISTANT STEEL / ALUM.
CENTER TUBE	CORROSION RESISTANT STEEL
MEDIA GRADE	A BETA 200 MICROGLASS W STAINLESS STEEL WIRE MESH
SEALS	NITRILE (-45°F TO 225°F) FLUOROCARBON (-20°F TO 250°F)

Tolerances (Unless otherwise specified)	
0.0	: ± 0.090"
0.00	: ± 0.030"
0.000	: ± 0.005"

Collapse Rating: 450 PSID
Filtration Rating: $B_x = 200$
 $B_x[c] = 1000$