

# BEHRINGER®

## BE9600/16-25A Data Sheet

### Dimensional Data:

Length: 16.84 IN  
 OD (Top): 3.098 IN  
 OD (Bottom): 3.098 IN  
 ID (Top): 1.695 IN  
 ID (Bottom): None  
 Thread: None




### Performance Data:

Micron Rating: 25.00  
 Maximum Temperature: 225 °F  
 Collapse Rating: 290 PSID  
 Flow Direction: Out to In  
 Recommended Change Out: 50 PSID  
 By-Pass: None

### Physical Specifications:

Media: Microglass  
 Gasket Material: Buna  
 Gasket Type: O-Ring  
 Adhesive: Epoxy  
 End Caps: Corrosion Resistant CS/AL  
 Center Tube: Corrosion Resistant CS  
 Configuration: SOE

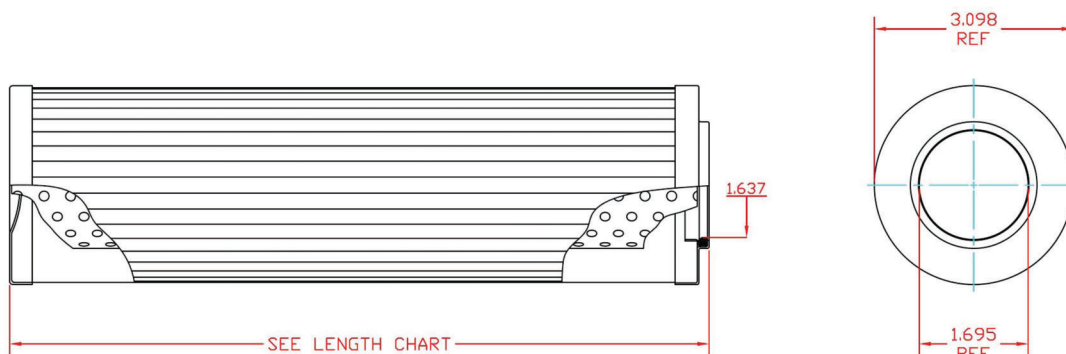

Materials of Construction	
Center Tube	Corrosion Resistant Steel / Aluminum
End Caps	Corrosion Resistant Steel
Seals	omit Nitrile (-45°F to 225°F)
	V Viton (-20°F to 250°F)
	E EPR (-65°F to 300°F)
Pleat Pack	A Absolute Rated Micro-Glass
	N Nominal Paper
	W Stainless Steel Wire Mesh
	SF Stainless Steel Fiber
H	Micro-Glass with Water Removal

Length Chart	
/4	4.650 ± .040
/8	8.187 ± .040
/11	10.900 ± .040
/13	12.930 ± .040
/16	16.840 ± .040

TOLERANCES (Unless Otherwise Specified)	
	0.0: ± 0.090 in.
	0.00: ± 0.030 in.
	0.000: ± 0.005 in.

Collapse Rating: 290 psid  
 Filtration Rating:  $B_x = 200$   
 $B_{x[C]} = 1000$