

# BEHRINGER®

## BE9601/8-06AV Data Sheet

### Dimensional Data:

Length: 8.19 IN  
 OD (Top): 3.10 IN  
 OD (Bottom): 3.10 IN  
 ID (Top): 1.690 IN  
 ID (Bottom): None  
 Thread: None





### Performance Data:

Micron Rating: 6.00  
 Maximum Temperature: 225 °F  
 Collapse Rating: 3000 PSID  
 Flow Direction: Out to In  
 Recommended Change Out: 50 PSID  
 By-Pass: None

### Physical Specifications:

Media: Microglass  
 Gasket Material: Viton  
 Gasket Type: O-Ring  
 Adhesive: Epoxy  
 End Caps: Corrosion Resistant CS/AL  
 Center Tube: Corrosion Resistant CS  
 Configuration: SOE

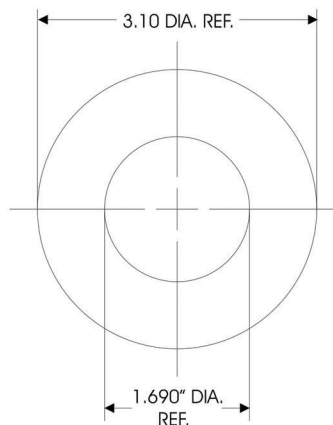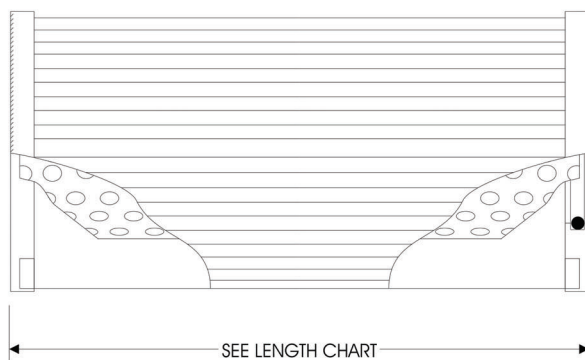

END CAPS	CORROSION RESISTANT STEEL / ALUM.	
CENTER TUBE	CORROSION RESISTANT STEEL	
MEDIA GRADE	A	BETA 200 MICROGLASS
	W	STAINLESS STEEL WIRE MESH
SEALS	NITRILE	(-45°F TO 225°F)
	FLUOROCARBON	(-20°F TO 250°F)

LENGTH CHART	
/4	4.65 ±.040
/8	8.187 ±.040
/11	11.30 ±.040
/13	12.93 ±.040
/16	16.84 ±.040
/21	20.87 ±.040

Tolerances (Unless otherwise specified)	
0.0	: ±0.090"
0.00	: ±0.030"
0.000	: ±0.005"

Collapse Rating: 3000 psid  
 Filtration Rating:  $B_x = 200$   
 $B_x[c] = 1000$