

BEHRINGER®

BEK/18-06A Data Sheet

Dimensional Data:

Length: 18.550 IN
 OD (Top): 3.87 IN
 OD (Bottom): 3.87 IN
 ID (Top): 1.60 IN
 ID (Bottom): 1.60 IN
 Thread: None





Performance Data:

Micron Rating: 6.00
 Maximum Temperature: 250 °F
 Collapse Rating: 150 PSID
 Flow Direction: Out to In
 Recommended Change Out: 50 PSID
 By-Pass: None

Physical Specifications:

Media: Microglass
 Seal Material: Buna
 Adhesive: Epoxy
 End Caps: Corrosion Resistant CS/AL
 Center Tube: Corrosion Resistant CS
 Configuration: DOE

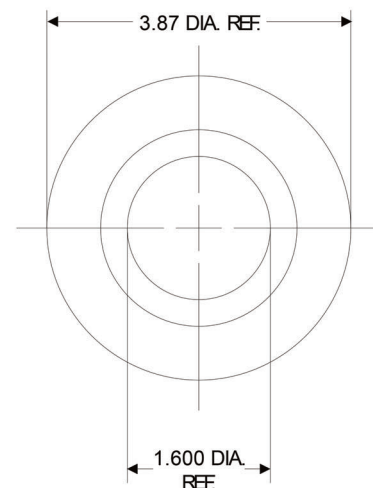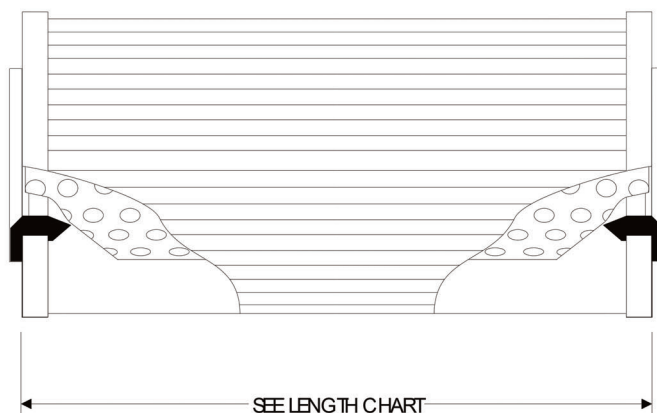

Collapse Rating: 150 psid
 Filtration Rating: Bx = 200
 Bx[c] = 1000

END CAPS	CORROSION RESISTANT STEEL / ALUM.
CENTER TUBE	CORROSION RESISTANT STEEL
MEDIA GRADE	BETA 200 MICROGLASS
SEALS	NITRILE (-45F TO 225F) FLUOROCARBON (-20F TO 250f)

LENGTH CHART	
/9	9.050"
/18	18.550"
/27	27.00"

Tolerances (Unless otherwise specified)	
0.0	: ± 0.090"
0.00	: ± 0.030"
0.000	: ± 0.005"