


# BEHRINGER®

## BEK/18-25AH Data Sheet

### Dimensional Data:

Length: 18.450 IN  
 OD (Top): 3.84 IN  
 OD (Bottom): 3.84 IN  
 ID (Top): 1.647 IN  
 ID (Bottom): 1.647 IN  
 Thread: None




### Performance Data:

Micron Rating: 25.00  
 Maximum Temperature: 250 °F  
 Collapse Rating: 3000 PSID  
 Flow Direction: Out to In  
 Recommended Change Out: 50 PSID  
 By-Pass: None

### Physical Specifications:

Media: Microglass  
 Seal Material: Buna  
 Adhesive: Epoxy  
 End Caps: Corrosion Resistant CS/AL  
 Center Tube: Corrosion Resistant CS  
 Configuration: DOE

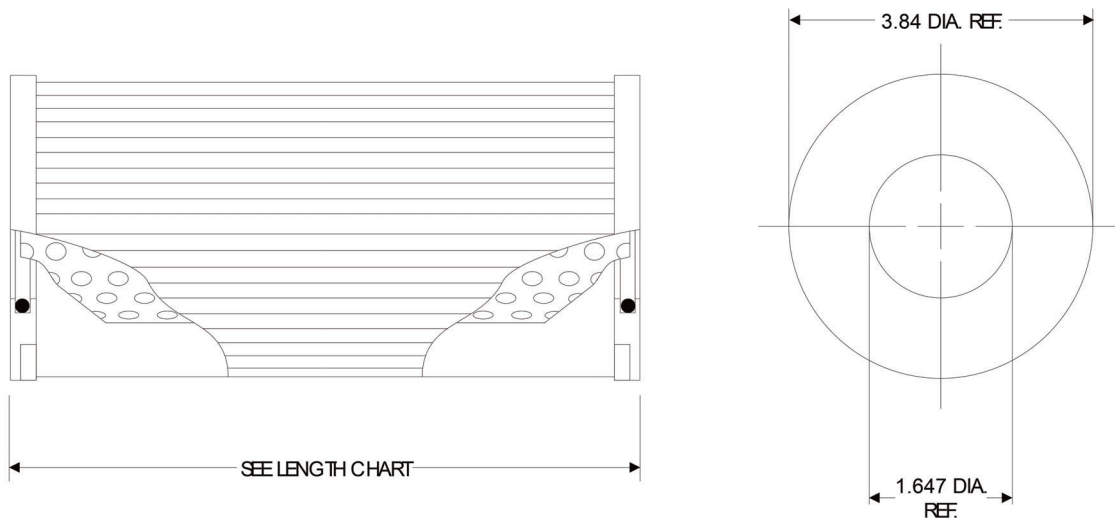

END CAPS	CORROSION RESISTANT STEEL / ALUM.
CENTER TUBE	CORROSION RESISTANT STEEL
MEDIA GRADE	A BETA 200 MICROGLASS W STAINLESS STEEL WIRE MESH
SEALS	NITRILE (-45°F TO 225°F) FLUOROCARBON (-20°F TO 250°F)

LENGTH CHART	
/9	9.050 ± .040
/18	18.450 ± .040
/27	27.000 ± .040

Tolerances (Unless otherwise specified)	
0.0	: ± 0.090"
0.00	: ± 0.030"
0.000	: ± 0.005"

Collapse Rating: 3000 PSID  
 Filtration Rating:  $B_x = 200$   
 $B_{x[c]} = 1000$