

BEHRINGER®

BEK/9-12A Data Sheet

Dimensional Data:

Length: 9.050 IN
 OD (Top): 3.87 IN
 OD (Bottom): 3.87 IN
 ID (Top): 1.60 IN
 ID (Bottom): 1.60 IN
 Thread: None





Performance Data:

Micron Rating: 12.00
 Maximum Temperature: 250 °F
 Collapse Rating: 150 PSID
 Flow Direction: Out to In
 Recommended Change Out: 50 PSID
 By-Pass: None

Physical Specifications:

Media: Microglass
 Seal Material: Buna
 Adhesive: Epoxy
 End Caps: Corrosion Resistant CS/AL
 Center Tube: Corrosion Resistant CS
 Configuration: DOE

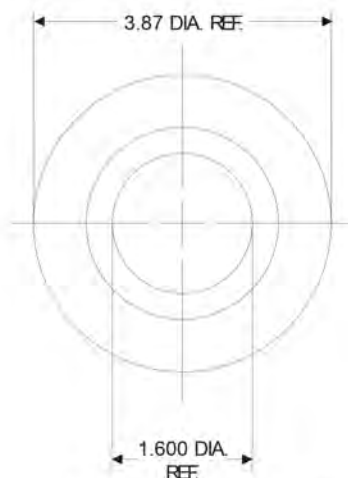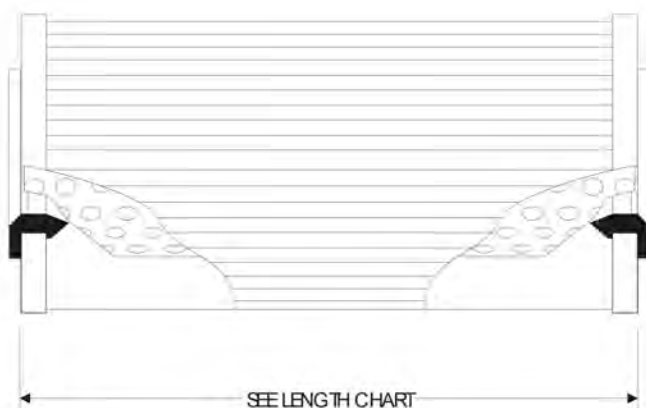

Collapse Rating: 150 psid
 Filtration Rating: Bx = 200
 Bx[c] = 1000

| | |
|-------------|---|
| END CAPS | CORROSION RESISTANT STEEL / ALUM. |
| CENTER TUBE | CORROSION RESISTANT STEEL |
| MEDIA GRADE | BETA 200 MICROGLASS |
| SEALS | NITRILE (-45F TO 225F) FLUOROCARBON (-20F TO 250f) |

| LENGTH CHART | |
|--|------------|
| /9 | 9.050" |
| /18 | 18.550" |
| /27 | 27.00" |
| Tolerances (Unless otherwise specified) | |
| 0.0 | : ± 0.090" |
| 0.00 | : ± 0.030" |
| 0.000 | : ± 0.005" |