

# BEHRINGER®

## BEK/9-40A Data Sheet

### Dimensional Data:

Length: 9.050 IN  
 OD (Top): 3.87 IN  
 OD (Bottom): 3.87 IN  
 ID (Top): 1.60 IN  
 ID (Bottom): 1.60 IN  
 Thread: None





### Performance Data:

Micron Rating: 40.00  
 Maximum Temperature: 250 °F  
 Collapse Rating: 150 PSID  
 Flow Direction: Out to In  
 Recommended Change Out: 50 PSID  
 By-Pass: None

### Physical Specifications:

Media: Microglass  
 Seal Material: Buna  
 Adhesive: Epoxy  
 End Caps: Corrosion Resistant CS/AL  
 Center Tube: Corrosion Resistant CS  
 Configuration: DOE

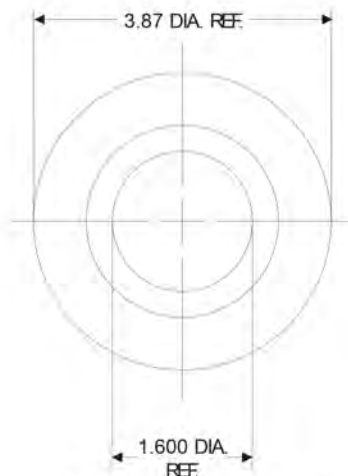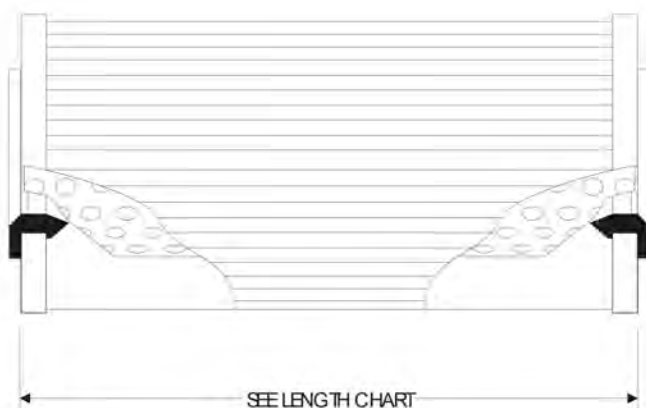

Collapse Rating: 150 psid  
 Filtration Rating: Bx = 200  
 Bx[c] = 1000

|             |                                                       |
|-------------|-------------------------------------------------------|
| END CAPS    | CORROSION RESISTANT STEEL / ALUM.                     |
| CENTER TUBE | CORROSION RESISTANT STEEL                             |
| MEDIA GRADE | BETA 200 MICROGLASS                                   |
| SEALS       | NITRILE (-45F TO 225F)<br>FLUOROCARBON (-20F TO 250f) |

| LENGTH CHART                               |          |
|--------------------------------------------|----------|
| /9                                         | 9.050"   |
| /18                                        | 18.550"  |
| /27                                        | 27.00"   |
| Tolerances<br>(Unless otherwise specified) |          |
| 0.0                                        | ± 0.090" |
| 0.00                                       | ± 0.030" |
| 0.000                                      | ± 0.005" |